

TENAX RF 2

Bi-oriented net

TENAX RF 2 is a plastic grid with square apertures, black coloured, made in Polypropylene (PP), obtained from a unique process of extrusion and biaxial orientation that determines the orientation of the PP molecules, enhancing the mechanical and physical characteristics.

PHYSICAL CHARACTERISTICS	TEST METHOD	UNIT	RF 2	NOTES
COMPOSITION			POLYPROPYLENE	-
MESH SHAPE			QUADRANGULAR	-
COLOUR			GREY	-
PACKAGING			ROLLS	-

DIMENSIONAL CHARACTERISTICS	TEST METHOD	UNIT	RF 2	NOTES
MD PITCH		mm	51.0	-
TD PITCH		mm	71.0	-
UNIT WEIGHT		g/m ²	250.0	-
ROLL WIDTH		m	1.0	1.5 2.0 -
ROLL LENGTH		m	50.0	50.0 50.0 -
COVERED AREA		m ²	50.0	75.0 100.0 -
ROLL DIAMETER		m	0.30	0.30 0.30 -
ROLL VOLUME		m ³	0.10	0.14 0.19 -
ROLL WEIGHT		Kg	14.2	21.4 28.5 -
INNER TUBULAR DIAMETER		m ³	76.5	-

TECHNICAL CHARACTERISTICS	TEST METHOD	UNIT	RF 2	NOTES
MD TENSILE STRENGTH	ISO 10319	kN/m	15.0	a
MD ELONGATION	ISO 10319	%	15.0	a
TD TENSILE STRENGTH	ISO 10319	kN/m	22.0	a
TD ELONGATION	ISO 10319	%	12.0	a


NOTES:

The data contained in this publication are based on the knowledge available at the time of printing and may be subjected to amendments due to changes of the methods of testing and/or manufacturing. All dimensions and properties are reported as typical values, otherwise specified. TENAX nets are thermoplastic products subjected to shrinkage and deformations.

MD: longitudinal direction.

TD: transversal direction.



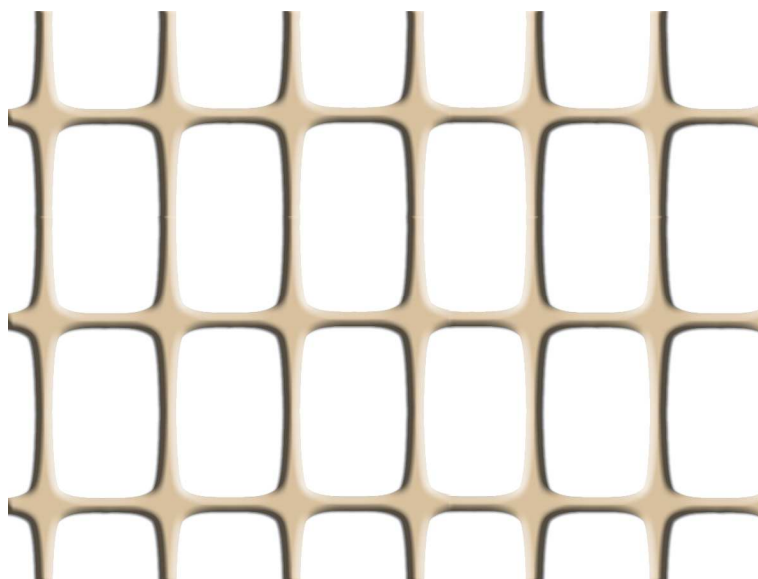

Just Indicating

TENAX Spa Quality System has been assessed and registered in agreement with ISO:9001:2008 by SGS Italy and SGS UK.



The TENAX Laboratory has been operational since 1980 and has been continuously improved with the purpose of assuring unequalled technical development of the products and accurate Quality Control. The TENAX Laboratory can perform mechanical, hydraulic and durability tests, according to the most important international standards like ISO, CEN, ASTM, DIN, BSI, UNI.



TENAX SpA
Via dell'Industria, 3
23897 Viganò (LC)
Tel. +39 039.9219300
Fax +39 039.9219290
customer.service@tenax.net