

# TENAX MULTIMAT

Type: 100  
Geomat



TENAX MULTIMAT are polypropylene erosion control geomats, designed for protection and growing of grass on slopes subject to surface erosion. TENAX MULTIMAT are three dimensional mats composed by extruded and bioriented polypropylene grids, laid one upon each another and tied up by means of a black polypropylene yarn. The three dimensional structure is purposely engineered for trapping a layer of topsoil, thus avoiding rainfall erosion by both sheltering the surface against the impact of raindrops and by restricting the movement of the soil particles.

## Typical applications

Roadway ditches; slope protection; storm and irrigation channels; lakes banks; landfill cover.

PHYSICAL CHARACTERISTICS	TEST METHOD	UNIT	MULTIMAT 100	NOTES
STRUCTURE			THREE DIMENSIONAL GEOMAT COMPOSED BY 3 LAYERS	
MESH TYPE			RECTANGULAR APERTURES	
STANDARD COLOR			BLACK	
POLYMER TYPE			POLYPROPYLENE	
CARBON BLACK CONTENT	ASTM D4218		1.0%	
PACKAGING	ISO 10320		ROLLS WITH IDENTIFICATION LABEL	

DIMENSIONAL CHARACTERISTICS	TEST METHOD	UNIT	MULTIMAT 100	NOTES
APERTURE SIZE MD		mm	12.0	a,b
APERTURE SIZE TD		mm	16.0	a,b
THICKNESS	ISO 9863	mm	20.0	d
ROLL WIDTH		m	2.20	a
ROLL LENGTH		m	30.0	a
ROLL DIAMETER		m	0.75	a
ROLL VOLUME		m <sup>3</sup>	1.30	a

TECHNICAL CHARACTERISTICS	TEST METHOD	UNIT	MULTIMAT 100		NOTES
			MD	TD	
PEAK TENSILE STRENGTH	ISO 10319	kN/m	10.0	15.0	b,c
YIELD POINT ELONGATION	ISO 10319	%	20.0	15.0	a,b


### NOTES:

- a) Typical values
- b) MD : machine direction (longitudinal to the roll)  
TD : transverse direction (across roll width)
- c) Tolerance: -1 kN/m
- d) Tolerance: - 3 mm



## Typical Characteristics

---

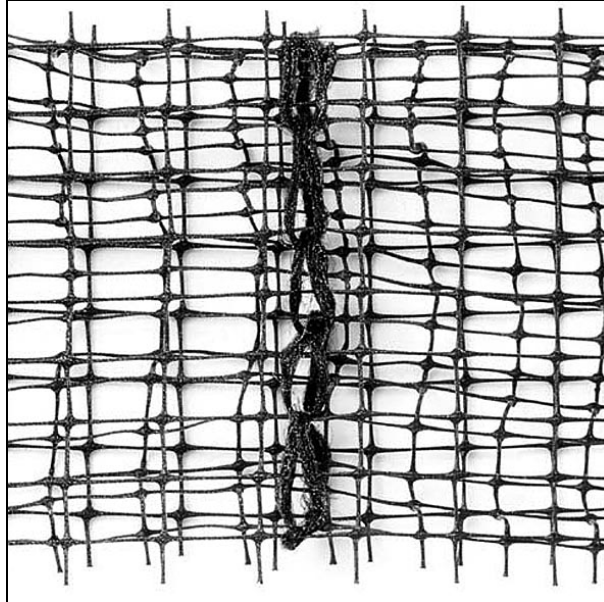

TENAX MULTIMAT 100



0799-CPD-25



The TENAX Laboratory has been operational since 1980 and has been continuously improved with the purpose of assuring unequalled technical development of the products and accurate Quality Control.

The TENAX Laboratory can perform mechanical, hydraulic and durability tests, according to the most important international standards like ISO, CEN, ASTM, DIN, BSI, UNI.

TENAX SpA  
Geosynthetics Division  
Via dell'Industria, 3  
I-23897 Viganò (LC) ITALY  
Tel. +39 039.9219307  
Fax +39 039.9219200  
e-mail: [geo@tenax.net](mailto:geo@tenax.net)  
Web Site: [www.tenax.net](http://www.tenax.net)

TENAX International B.V.  
Geosynthetics Division  
Viale S. Franscini, 19  
CH-6900 Lugano SWITZERLAND  
Tel. +41 091.9233412  
Fax +41 091.9237517  
e-mail: [geo@tenax.ch](mailto:geo@tenax.ch)  
Web Site: [www.tenax.net](http://www.tenax.net)



**TENAX**