


TENAX GRIFON PLUS

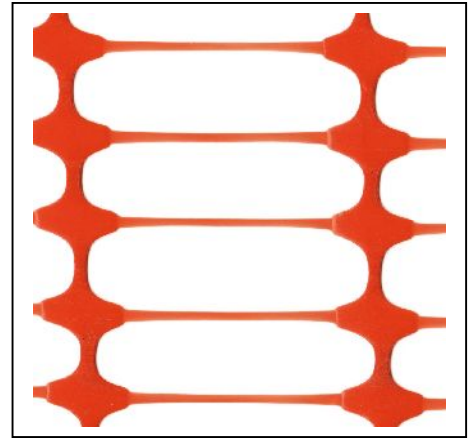

Picture out of scale

Extruded, high density polyethylene (HDPE) net, subjected during production to a stretching process in longitudinal direction (MD).

PHYSICAL CHARACTERISTICS	TEST METHOD	UNIT	GRIFON PLUS	NOTES
POLYMER TYPE			HDPE	-
MESH SHAPE			RECTANGULAR	-
COLOUR			ORANGE	-

DIMENSIONAL CHARACTERISTICS	TEST METHOD	UNIT	GRIFON PLUS		NOTES
MD PITCH		mm	70.0		a
UNIT WEIGHT		g/m ²	100.0		-
WIDTH		m	1.20	1.80	-
ROLL LENGTH		m	50.0	50.0	-
ROLL DIAMETER		m	0.16	0.16	-
ROLL VOLUME		m ³	0.03	0.05	-
ROLL WEIGHT		kg	6.2	9.2	-
INNER PACKAGING			PE BAG		
OUTER PACKAGING					

TECHNICAL CHARACTERISTICS	TEST METHOD	UNIT	GRIFON PLUS	NOTES
TENSILE STRENGTH MD	METHOD TX3	kN/m	3.3	a, b
ELONGATION MD	METHOD TX3	%	15.0	a, b

NOTES:

- a) MD: machine direction
- b) TX3: 300 mm/min

The data contained in this publication are based on the knowledge available at the time of printing and may be subjected to amendments due to changes of the methods of testing and/or manufacturing. All dimensions are reported as typical values.

Tenax nets are thermoplastic products subjected to shrinkage. MD: longitudinal direction. TD: transversal direction.

Tenax Spa Quality System has been assessed and registered in agreement with ISO 9001:2008 Standard.

GEN 1056,1 - E - 11/16



www.tenax.net

TENAX SpA
Via dell'Industria, 3
23897 Viganò (LC)
Tel. +39 039.9219300
Fax +39 039.9219290
customer.service@tenax.net



SGS ITALY Certificate n° IT93/0028 01
SGS U.K. Certificate n° IT93/2568 01

