


TENAX WORKING

Extruded, high density polyethylene net with ovidal mesh with horizontal antitear selvages on the borders. On the central band is coupled a reflective tape with the text "Lavori in corso".

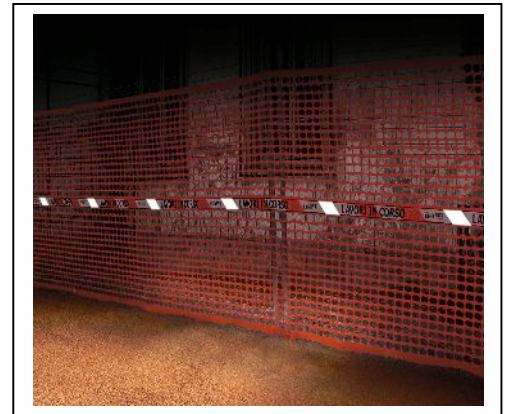

Picture out of scale

PHYSICAL CHARACTERISTICS	TEST METHOD	UNIT	WORKING	NOTES
POLYMER TUPE			HDPE	-
MESH SHAPE			OVOIDAL	-
COLOUR			ORANGE	-

DIEMNSIONAL CHARACTERISTICS	TEST METHOD	UNIT	WORKING				NOTES
MD PITCH		mm	55	55	55	55	a
TD PITCH		mm	55	60	42	50	a
UNIT WEIGHT		g/m ²	200				c
ROLL WIDTH		m	1.0	1.2	1.5	1.8	-
ROLL LENGTH		m	50.0	50.0	50.0	50.0	-
ROLL DIAMETER		m	0.20	0.20	0.20	0.20	-
ROLL VOLUME		m ³	0.04	0.05	0.06	0.07	-
ROLL WEIGHT		kg	10.2	12.4	15.2	18.4	c
INNER PACKAGING			PE BAG				-
OUTER PACKAGING			-				-

TECHNICAL CHARACTERISTICS	TEST METHOD	UNIT	WORKING	NOTES
MD – TD TENSILE STRENGTH	TX3 METHOD	kN/m	1.6	a, b
MD – TD ELONGATION	TX3 METHOD	%	6.0	a, b

IDENTIFICATION BAND CHARACTERISTICS	TEST METHOD	UNIT	WORKING	NOTES
POLYMER TYPE			PE	-
BAND TYPE			REFRACTIVE	-
WRITING			WORK IN PROGRESS	-
BAND THICKNESS		µm	81.0	-
BAND WIDTH		mm	70.0	-
LOGO CUSTOMIZATION			MINIMUM QUANTITY	-

NOTE:

- a) MD: machine direction
TD: transversal direction
- b) TX3: 300 mm/min
- c) Tolerance ± 5%

GEN 226.7 - E - 03/17



www.tenax.net

TENAX SpA
Via dell'Industria, 3
23897 Viganò (LC)
Tel. +39 039.9219300
Fax +39 039.9219290
customer.service@tenax.net



SGS ITALY Certificate n° IT93/0028 01
SGS U.K. Certificate n° IT93/2568 01

