


TENAX KAP/ETAG

Fiberglass net with quadrangular mesh coated with anti alkaline sizing.

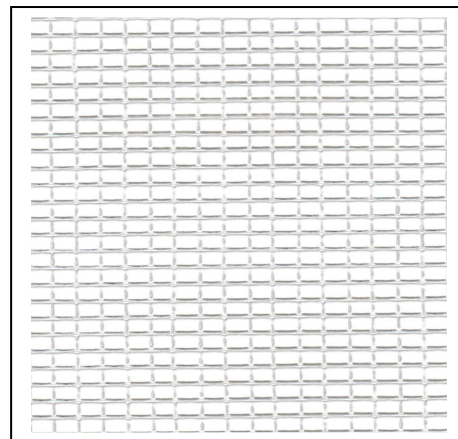

Picture out of scale

PHYSICAL CHARACTERISTICS	TEST METHOD	UNIT	KAP/ETAG	NOTES
COMPOSITION			FIBERGLASS WITH ANTI ALKALINE SIZING	-
MESH SHAPE			QUADRANGULAR	-
COLOUR			WHITE	-

DIMENSIONAL CHARACTERISTICS	TEST METHOD	UNIT	KAP/ETAG	NOTES
APERTURE MD		mm	5.0	a
APERTURE TD		mm	5.0	a
UNIT WEIGHT		g/m ²	160	b
WIDTH		m	1.0	c
ROLL LENGTH		m	50.0	c
ROLL DIAMETER		m	0.19	-
ROLL VOLUME		m ³	0.04	-
ROLL WEIGHT		Kg	8.4	c
INNER PACKAGING			PE FILM	
OUTER PACKAGING			-	

TECHNICAL CHARACTERISTICS	TEST METHOD	UNIT	KAP/ETAG	NOTES
TENSILE STRENGTH MD	ETAG 004	kN/m	31	a
ELONGATION MD	ETAG 004	%	2.5	a
TENSILE STRENGTH TD	ETAG 004	kN/m	40	a
ELONGATION TD	ETAG 004	%	2.5	a

NOTES:

- a) MD: machine direction
TD: transversal direction
- b) Tolerance \pm 5%
- c) Tolerance \pm 1%

The data contained in this publication are based on the knowledge available at the time of printing and may be subjected to amendments due to changes of the methods of testing and/or manufacturing. All dimensions are properties are reported as typical values. Tenax Spa Quality System has been assessed and registered in agreement with ISO 9001:2008 Standard.

GEN 1000,2 - E - 11/16



www.tenax.net

TENAX SpA
Via dell'Industria, 3
23897 Viganò (LC)
Tel. +39 039.9219300
Fax +39 039.9219290
customer.service@tenax.net



SGS ITALY Certificate n° IT93/0008.01
SGS U.K. Certificate n° IT93/2568.01

