

TENAX LEVEX TUBE (medium)

Polyethylene estruded tube


PHYSICAL CHARACTERISTICS	TEST METHOD	UNIT	LEVEX TUBE	NOTES
POLYMER			HDPE	
MESH SHAPE			QUADRANGULAR	
COLOUR			BLACK	
PACKAGING			BUNDLE	

DIMENSIONAL CHARACTERISTICS	TEST METHOD	UNIT	LEVEX TUBE	NOTES
MD PITCH		mm	14.0	
TD PITCH		mm	7.0	
MD APERTURE		mm	12.0	
TD APERTURE		mm	5.0	
WEIGHT FOR LINEAR METER		g/m	250.0	a
INTERNAL TUBULAR DIAMETER		mm	134.0	
PIECE LENGTH		m	2.0	2.0 3.0
PIECES PER BUNDLE		m ³	5	10 10

NOTES:

a) Tolerance \pm 5%



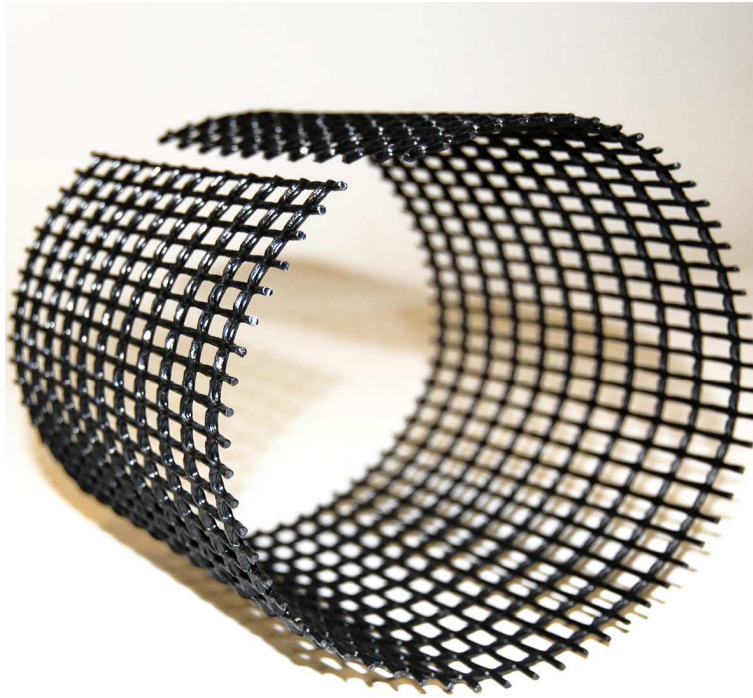

Just indicating

The data contained in this publication are based on the knowledge available at the time of printing and may be subjected to amendments due to changes of the methods of testing and/or manufacturing. All dimensions and properties are reported as typical values. Tenax nets are thermoplastic products subjected to shrinkage. MD: longitudinal direction. TD: transversal direction. Tenax Spa Quality System has been assessed and registered in agreement with ISO 9001:2008 Standard.

TENAX Spa Quality System has been assessed and registered in agreement with ISO:9001:2008 by SGS Italy and SGS UK.



SGS ITALY Certificate n° IT93/0008.01
SGS U.K. Certificate n° IT93/2568.01



The TENAX Laboratory has been operational since 1980 and has been continuously improved with the purpose of assuring unequalled technical development of the products and accurate Quality Control. The TENAX Laboratory can perform mechanical, hydraulic and durability tests, according to the most important international standards like ISO, CEN, ASTM, DIN, BSI, UNI.



TENAX SpA
Via dell'Industria, 3
23897 Viganò (LC)
Tel. +39 039.9219300
Fax +39 039.9219290
customer.service@tenax.net