

TENAX PRATOBLOCK

Pannelli modulari in polietilene ad alta densità.

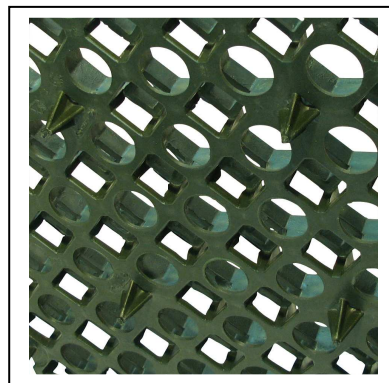


Immagine non in scala

CARATTERISTICHE FISICHE	METODI DI PROVA	UNITA'	PRATOBLOCK	NOTE
TIPO DI POLIMERO			POLIETILENE AD ALTA DENISTA'	-
STRUTTURA SUPERFICIALE			STRUTTURA A NIDO D'APE	-
COLORE			VERDE IN TONALITA' OMOGENEA	-


CARATTERISTICHE DIMENSIONALI	METODI DI PROVA	UNITA'	PRATOBLOCK	NOTE
SUPERFICIE NETTA POSATA		cm	50 x 50	a
PESO UNITARIO		g/m ²	4800	
ALTEZZA NIDO D'APE		cm	3,9	a
PESO SINGOLO PEZZO		cm	1,20	a
IMBALLO INTERNO				-
IMBALLO ESTERNO			-	-

CARATTERISTICHE TECNICHE	METODO DI PROVA	UNITA'	PRATOBLOCK	NOTE
PORTATA		t/m ²	> 210	-

NOTE:

a) Tolleranza $\pm 4\%$

MODALITA' DI POSA

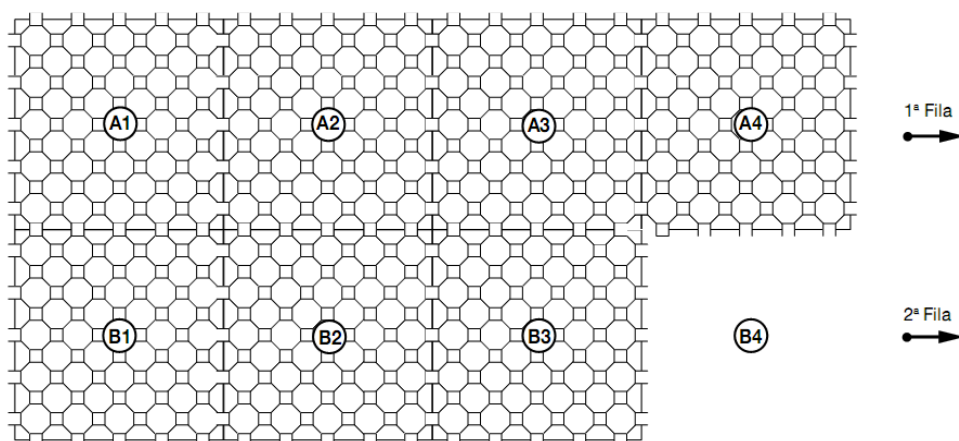

GEN 0697,2 - I - 09/17



www.tenax.net

TENAX SpA
Via dell'Industria, 3
23897 Viganò (LC)
Tel. +39 039.9219300
Fax +39 039.9219290
customer.service@tenax.net





TENAX Spa Quality System has been assessed and registered in agreement with ISO:9001:2008 by SGS Italy and SGS UK.

The TENAX Laboratory has been operational since 1980 and has been continuously improved with the purpose of assuring unequalled technical development of the products and accurate Quality Control. The TENAX Laboratory can perform mechanical, hydraulic and durability tests, according to the most important international standards like ISO, CEN, ASTM, DIN, BSI, UNI.



TENAX SpA
Via dell'Industria, 3
23897 Viganò (LC)
Tel. +39 039.9219300
Fax +39 039.9219290
customer.service@tenax.net