

TENAX SOLEADO HG

Woven net

PHYSICAL CHARACTERISTICS	TEST METHOD	UNIT	SOLEADO HG						NOTES
COMPOSITION			HDPE						-
U.V. STABILIZED			YES						-
MESH SHAPE			FLAT TEXTURE						-
COLOUR			GREEN - BLACK						-
SHADING FACTOR		%	80						-
PACKAGING			PE BAG						-


DIMENSIONAL CHARACTERISTICS	TEST METHOD	UNIT	SOLEADO HG						NOTES
UNIT WEIGHT		g/m ²	65						b
ROLL WIDTH		m	1.00	1.50	2.00	3.00	4.00	6.00	b
ROLL LENGTH		m	100.0	100.0	100.0	100.0	100.0	100.0	b
COVERED AREA		m ²	100.0	150.0	200.0	300.0	400.0	600.0	-
ROLL DIAMETER		m	0.20	0.20	0.27	0.30	0.31	0.35	-
ROLL VOLUME		m ³	0.04	0.06	0.08	0.14	0.20	0.26	b
ROLL WEIGHT		kg	7.0	10.5	13.5	20.3	27.0	40.0	-
INNER TUBULAR DIAMETER		mm	76.0						-

TECHNICAL CHARACTERISTICS	TEST METHOD	UNIT	SOLEADO HG						NOTES
MD TENSILE STRENGTH	ISO 13934-1 UNI 9405	N/m	3560						a
TD TENSILE STRENGTH	ISO 13934-1 UNI 9405	N/m	3200						a

NOTES:

- a) MD: machine direction
TD: trasversal direction
- b) Tolerances $\pm 4\%$



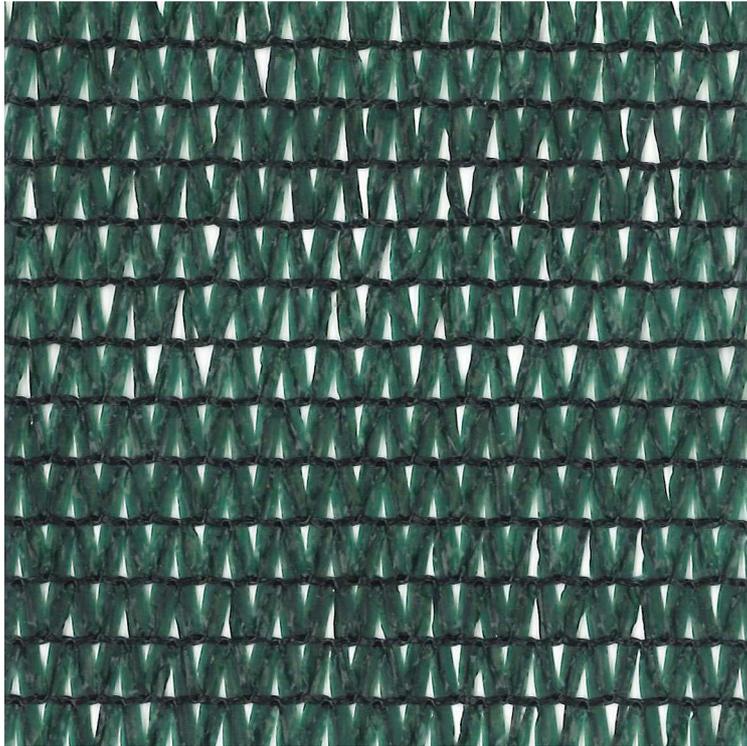

Just Indicating

The data contained in this publication are based on the knowledge available at the time of printing and may be subjected to amendments due to changes of the methods of testing and/or manufacturing. All dimensions are properties are reported as typical values. Tenax nets are thermoplastic products subjected to shrinkage. MD: longitudinal direction. TD: transversal direction.



Tenax Spa Quality System has been assessed and registered in agreement with ISO:9001:2008 by SGS Italy and SGS UK.

The TENAX Laboratory has been created in 1980 and has been continuously improved with the purpose of assuring unequalled technical development of the products and accurate Quality Control, The TENAX Laboratory can perform mechanical, hydraulic and durability tests, according to the most important international standards like ISO, CEN, ASTM, DIN, BSI, UNI.



TENAX SpA
Via dell'Industria, 3
23897 Viganò (LC)
Tel. +39 039.9219300
Fax +39 039.9219290
customer.service@tenax.net